


LEVER SHEARS

ROBUST AND HIGH QUALITY

The CR28 and CR32 models are designed to work with 2 lever positions in order to reduce the cutting effort. The lever position shown in Fig. 1, is for cutting up to 14 and 16 mm in diameter respectively, and for remaining diameters up to 28 and 32 mm (smooth), it will be carried out as explained in Fig. 2.

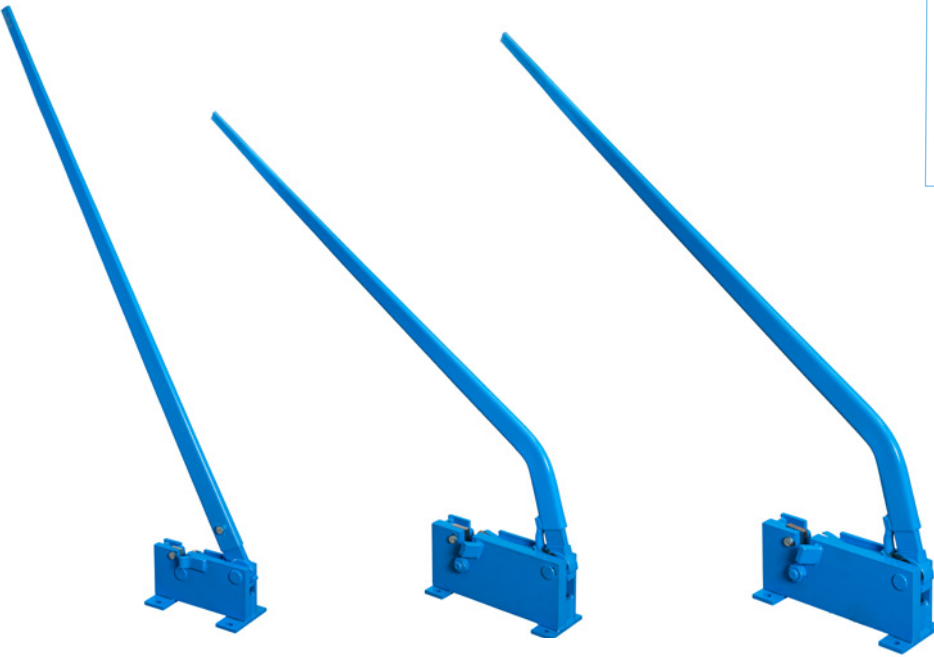

CR22

CR28

CR32

- Special alloy steel cutting blades, each with 8 cutting edges.
- Compact frame of welded steel plates.
- Supplied with a lever.

Fig. 1



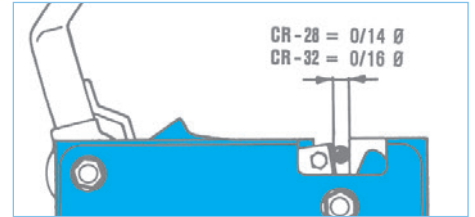


Fig. 2

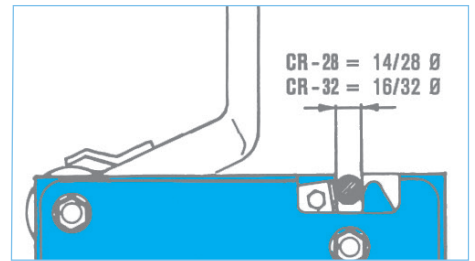

8-cut blades

CAPACITIES

Steel		CR22			CR28			CR32		
		○	□	▭	○	□	▭	○	□	▭
Smooth	mm	22	19	30 x 12	28	25	50 x 12	32	28	50 x 16
	inches	7/8"	3/4"	1 3/16" x 1/2"	1 1/8"	1"	2" x 1/2"	1 1/4"	1 1/8"	2" x 5/8"
B400S - Grade 40	mm	18	16	30 x 10	25	22	50 x 10	27	24	50 x 11
	inches	11/16"	5/8"	1 3/16" x 3/8"	1"	7/8"	2" x 3/8"	1 1/16"	15/16"	2" x 7/16"
B500S - Grade 60	mm	16	14	30 x 8	20	19	50 x 8	25	22	50 x 10
	inches	5/8"	9/16"	1 3/16" x 5/16"	13/16"	3/4"	2" x 5/16"	1"	7/8"	2" x 3/8"
Weight	kg	20			38			43		